

2/24/2020 Page 1 of 9

HARDWARE



5/16" x 1" Machine Bolt







5/16" Kep Nut


2/24/2020 Page 2 of 9

TOOLS REQUIRED







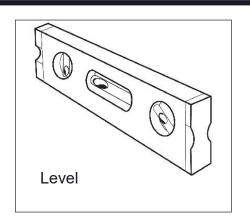

2/24/2020 Page 3 of 9

PRODUCT SPECIFICATIONS

T46WEBS 46" INGROUND TABLE WITH 4 SEATS

Top & Seats: 2" x 2" x 1/8" angle frame. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Top is additionally supported to the corners with 7 gauge x 1-1/2" flat bar. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 2-3/8" O.D. x 13 gauge pre-galvanized structural steel tubing. Brace attachment points are 1-1/2"x2"x3/16" steel flat bar. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Top is attached with 7 gauge 2"x2" die formed angle. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. Holes are predrilled in legs for optional surface mounting. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.

Dimensions: Top is 46" x 46" x 30" high from ground. Overall height is 41". Seats are 10" wide x 36" long x 18" high from ground. Outside to outside dimensions of 4 seat table is 77-1/2" x 77-1/2".

2/24/2020 Page 4 of 9

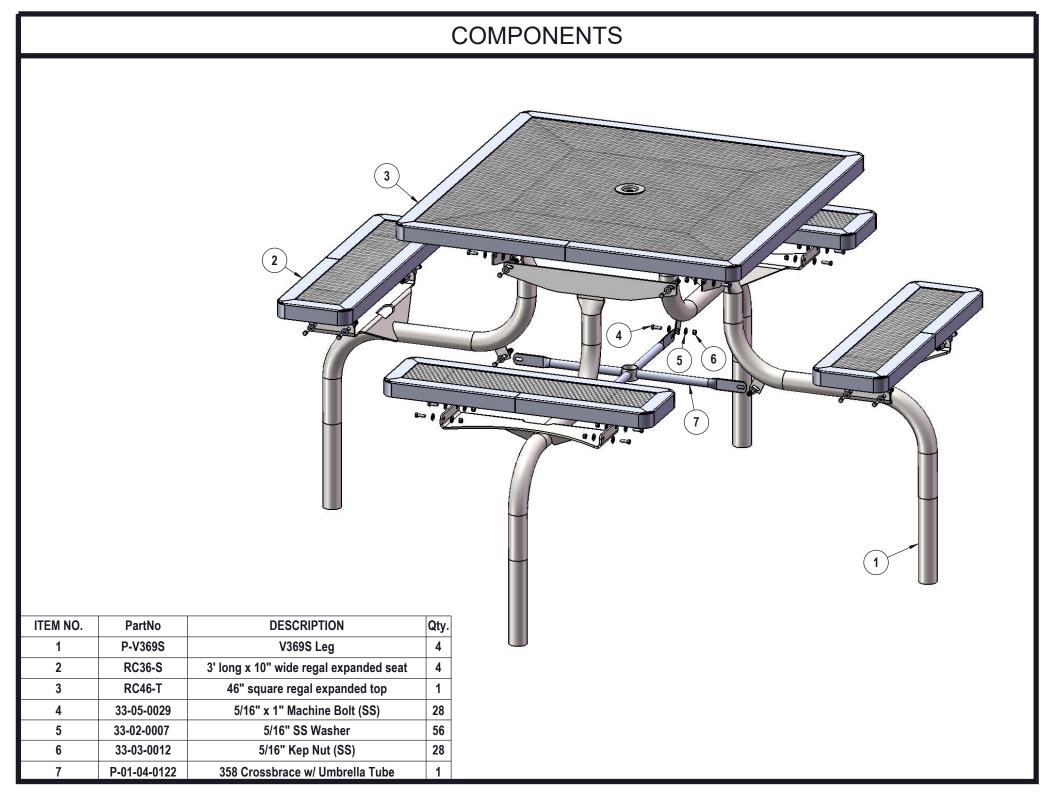

2/24/2020 Page 5 of 9

STEP 1



Attach the 369 Legs to the Top and Cross Brace as shown using specified hardware.


2/24/2020 Page 6 of 9

STEP 2




Attach the Seats to the 369 Legs as shown using specified hardware.

2/24/2020 Page 7 of 9

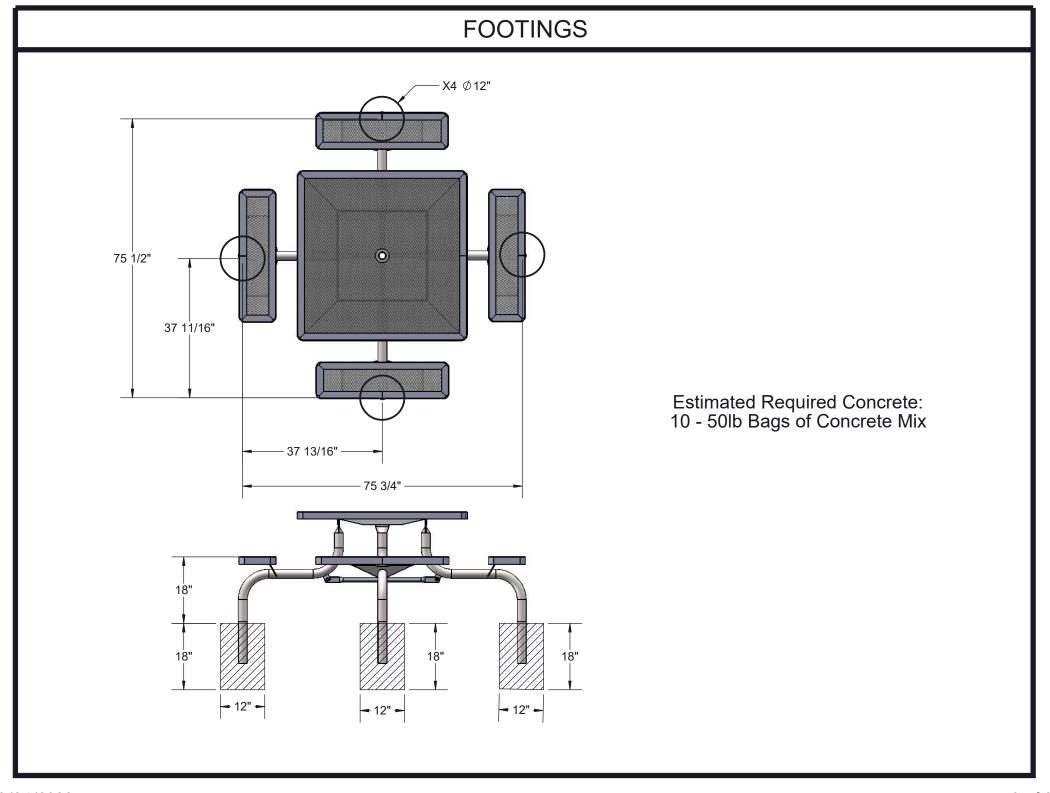

2/24/2020 Page 8 of 9

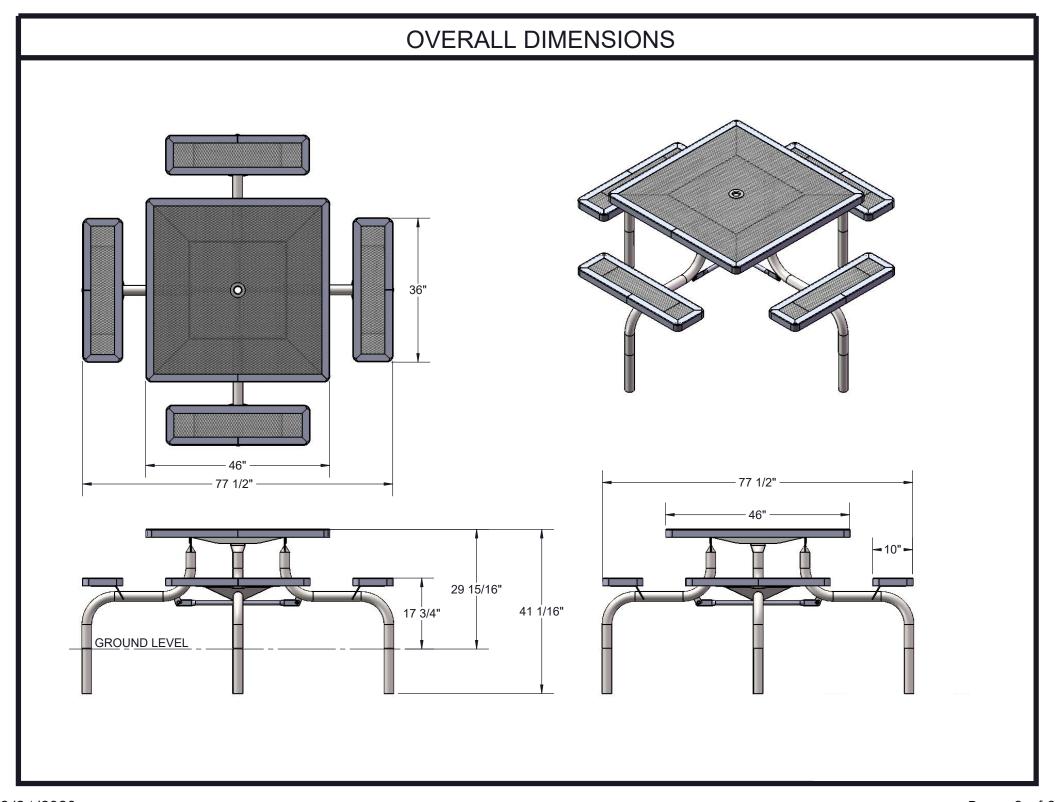

2/24/2020 Page 9 of 9